



YGN

Mahar Net

(How To Change Wifi User , Password , Limit Device)



Hot line : 09770333373



Viber : 09890988911

လူကြီးမင်းတို့၏ Router Model No နှင့်ဆောင်ရွက်ပုံအဆင့်ဆင့်များ


Mahar Net wifi Username, Password, Device Limit ပြုလုပ်ပုံအဆင့်ဆင့်

Model No : EG8141A5




Step (1) မိမိဖုန်းမှ Wifi ဖွင့်ပြီး သက်ဆိုင်ရာ Wifi Name ကို ချိတ်ဆက်ပါ။


မိမိ Wifi name ကိုရွေးချယ်ပါ။

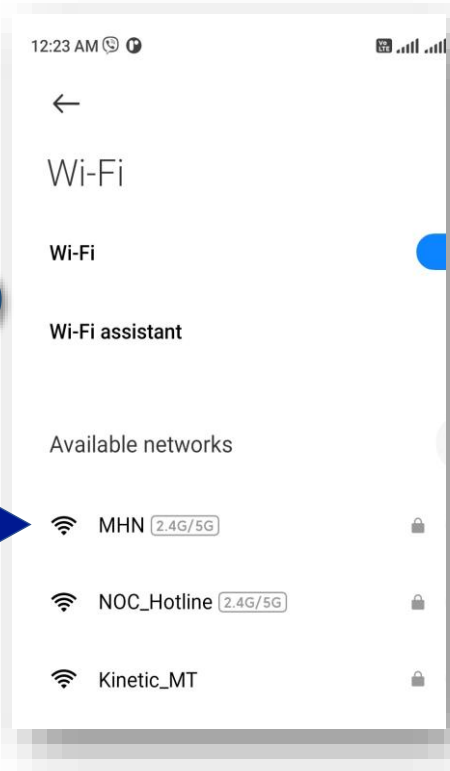

မိမိ wifi password ရိုက်ထည့်ပါ

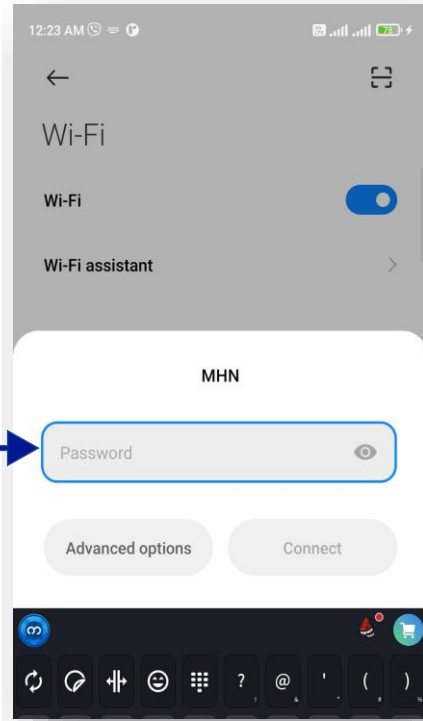


Browser ထဲသို့ဝင်ရန်

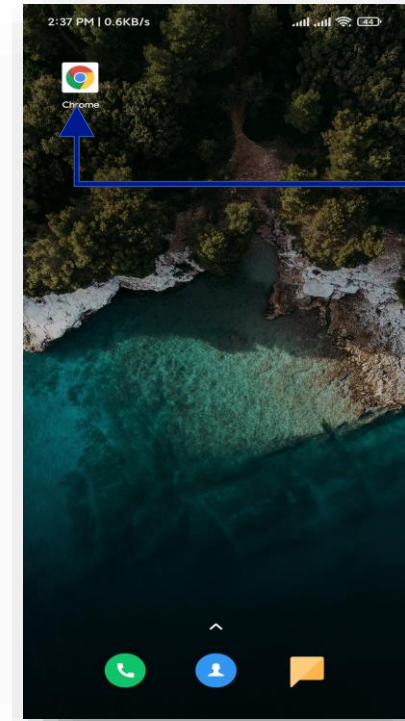


Step (2) မိမိ ဖုန်း (သို့) Desktop/ Laptop ထဲမှ Browser ထဲသို့ဝင်ရောက်ဆောင်ရွက်ပုံအဆင့်ဆင့်

လူကြီးမင်း၏ ဖုန်း Browser ထဲတွင် **192.168.100.1**
အားရိုက်ထည့်ရန်

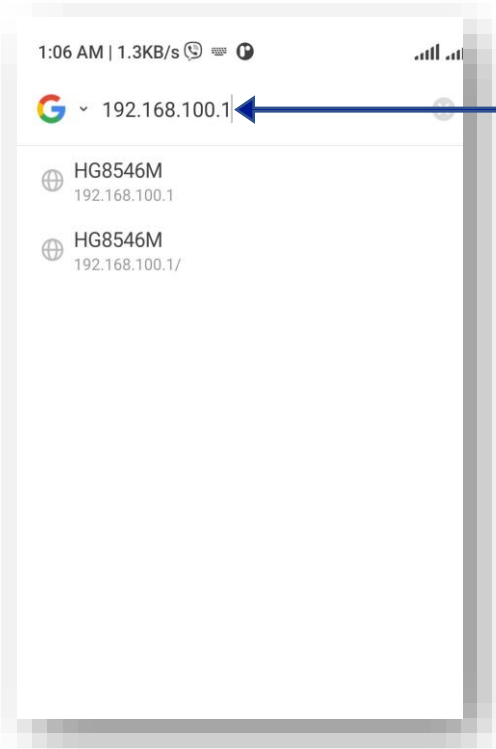


လူကြီးမင်း၏ Desktop/ Laptop Browser ထဲတွင် **192.168.100.1**
အားရိုက်ထည့်ရန်

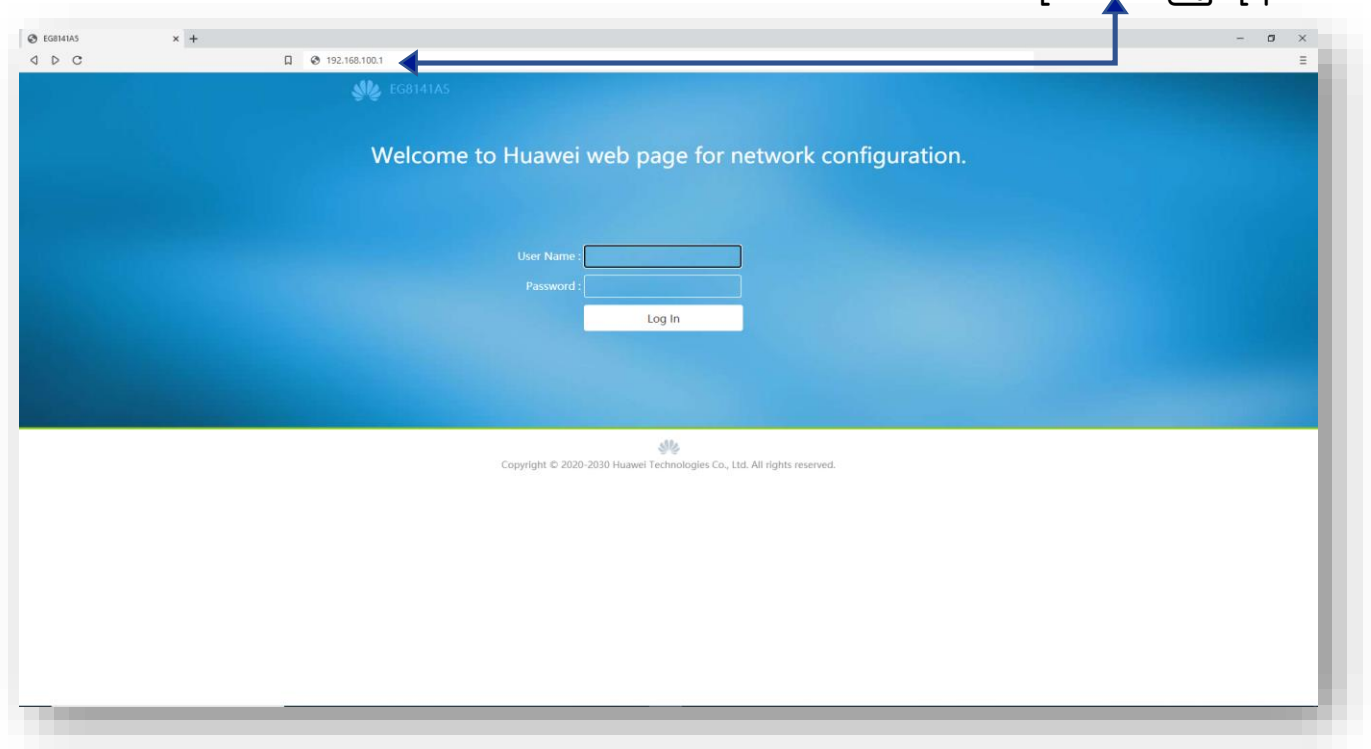

Step (3) လူကြီးမင်း၏ ဖုန်း နှင့် ကွန်ပျူတာ တွင် ဆက်လက်ဆောင်ရွက်ရန် အဆင့်ဆင့်

Browser တွင် 192.168.100.1 ရိုက်ထည့်ပြီးပါက ONU Login Page Box ပေါ်လာပါလိမ့်မည်


ထိုသို့ ပေါ်လာပါက Username တွင် **root** ကို ရိုက်ပါ Password တွင် **admin** ကိုရိုက် ပီး **Login** ကိုနှိပ်ပါ

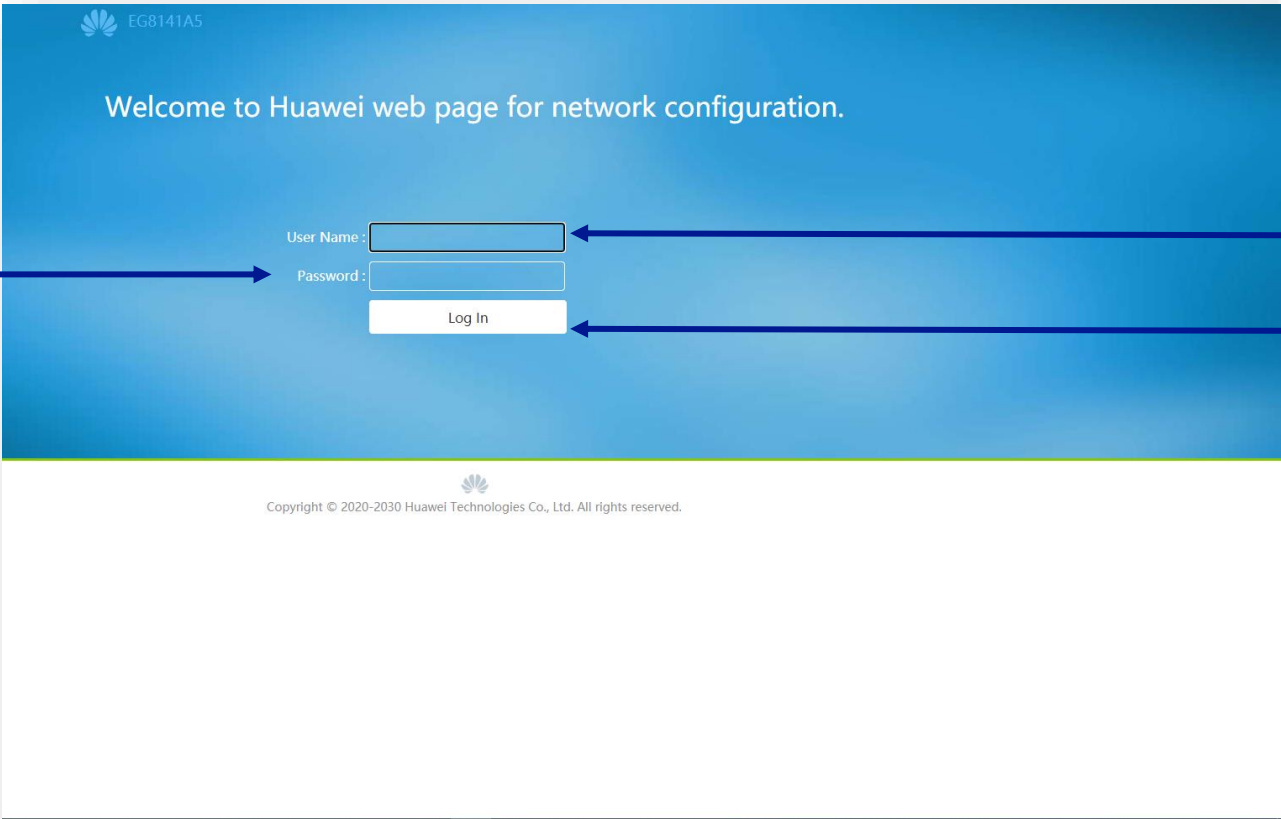

The screenshot shows the Huawei ONU login interface. At the top left, it says 'EG8141A5'. The main heading is 'Welcome to Huawei web page for network configuration.' Below this, there are two input fields: 'User Name:' and 'Password:'. A 'Log In' button is positioned below the password field. Annotations with arrows point to these elements: 'Password= admin' points to the password field; 'Username=root' points to the user name field; and 'Login နှိပ်ပါ' points to the 'Log In' button.


Step (4) ပထမဦးစွာ Advanced Configuration ကို ရွေးချယ်ပါ။

Advanced Configuration

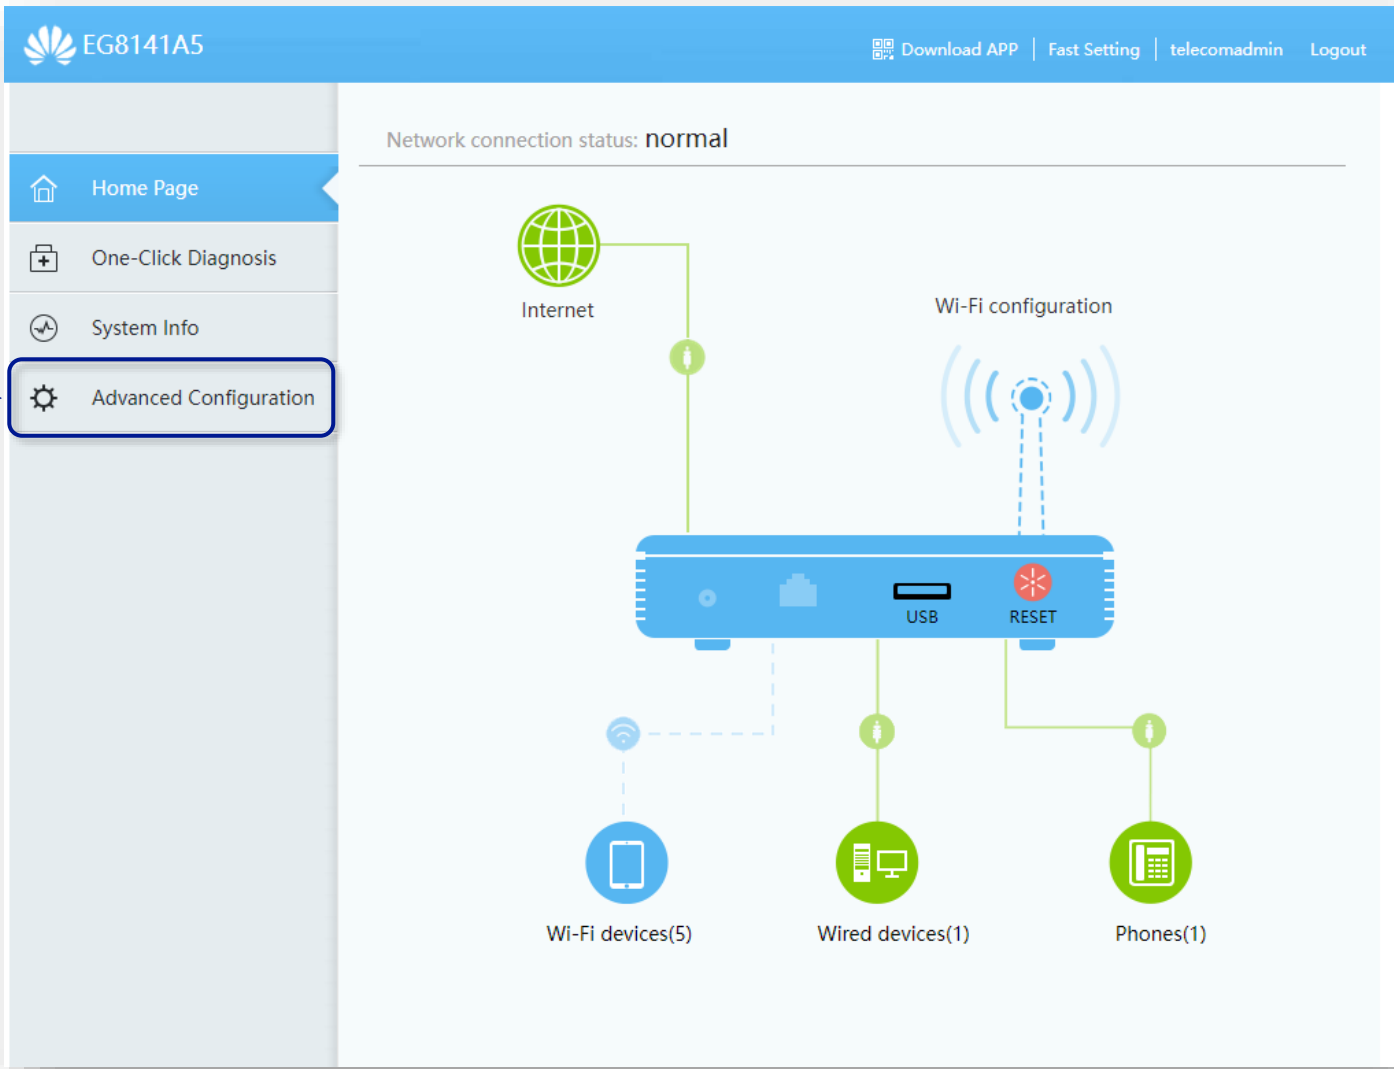

The screenshot shows the web interface for the EG8141A5 device. The top navigation bar includes 'EG8141A5', 'Download APP', 'Fast Setting', 'telecomadmin', and 'Logout'. The left sidebar contains menu items: 'Home Page', 'One-Click Diagnosis', 'System Info', and 'Advanced Configuration'. The 'Advanced Configuration' item is highlighted with a blue box and an arrow pointing from the external 'Advanced Configuration' label. The main content area displays 'Network connection status: normal' and a network diagram. The diagram shows the device connected to the Internet, with Wi-Fi configuration options. Below the device, it lists connected devices: 'Wi-Fi devices(5)', 'Wired devices(1)', and 'Phones(1)'. The device itself has 'USB' and 'RESET' buttons visible.

Step (5) WLAN Tag မှ 2.4G Basic Network Setting ထဲတွင် Wifi (Name ,Password) ချိန်းပါ ၊ ပြီးလျှင် Apply နှိပ်ရန် (For Mobile Phone/Desktop/Laptop)

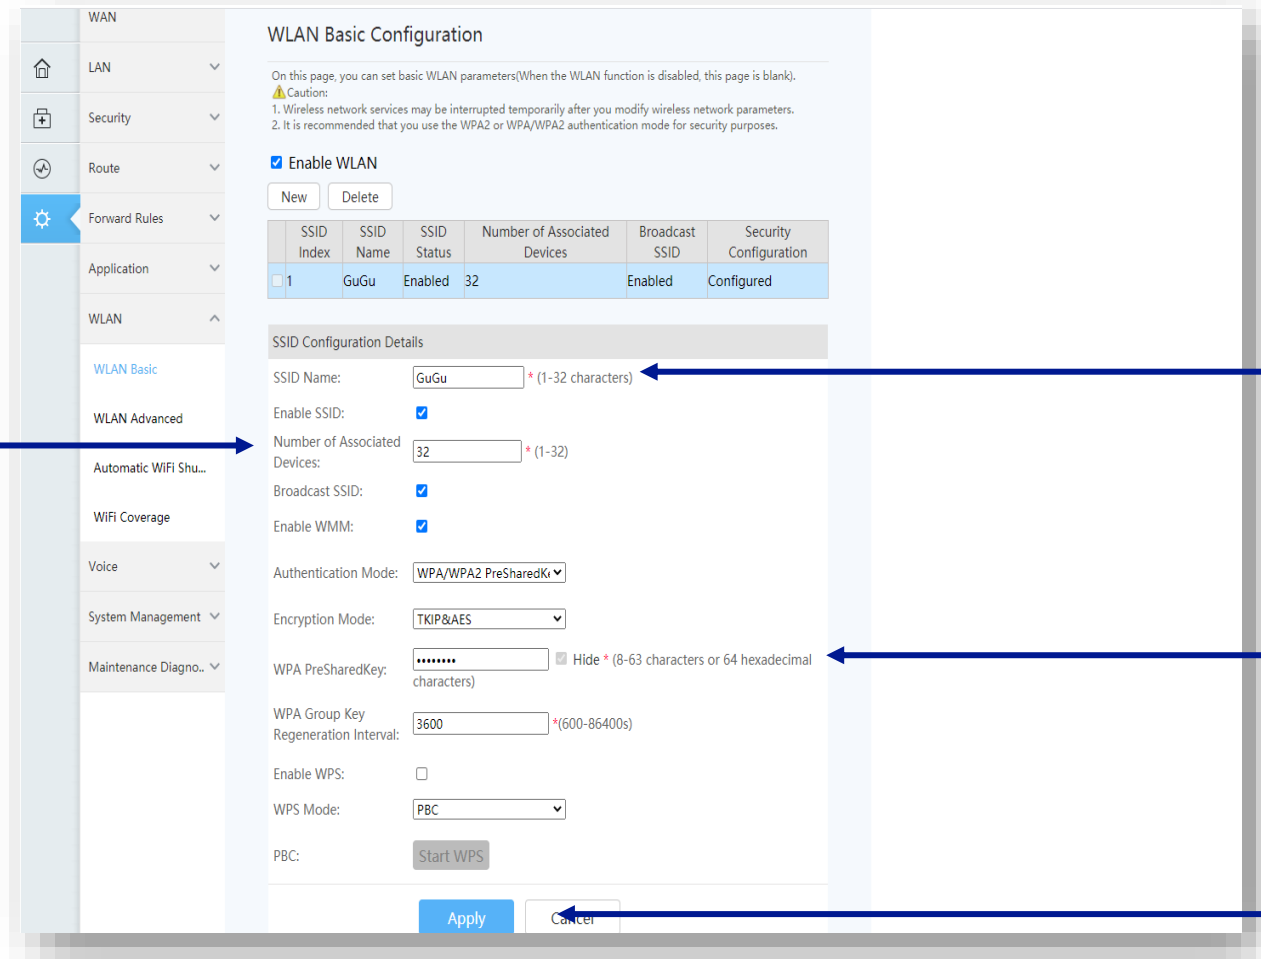

WLAN Basic Configuration

On this page, you can set basic WLAN parameters(When the WLAN function is disabled, this page is blank).
 ⚠ Caution:
 1. Wireless network services may be interrupted temporarily after you modify wireless network parameters.
 2. It is recommended that you use the WPA2 or WPA/WPA2 authentication mode for security purposes.

Enable WLAN

New Delete

SSID Index	SSID Name	SSID Status	Number of Associated Devices	Broadcast SSID	Security Configuration
<input type="checkbox"/> 1	GuGu	Enabled	32	Enabled	Configured

SSID Configuration Details

SSID Name: * (1-32 characters)

Enable SSID:

Number of Associated Devices: * (1-32)

Broadcast SSID:

Enable WMM:

Authentication Mode:

Encryption Mode:

WPA PreSharedKey: Hide * (8-63 characters or 64 hexadecimal characters)

WPA Group Key Regeneration Interval: *(600-86400s)

Enable WPS:

WPS Mode:

PBC:

User အရေအတွက်ကန့်သတ်ရန်

Wifi Name ချိန်းရန်

Password ချိန်းရန်

Apply နှိပ်ရန်

Remark : WLAN Tag မှ WLAN Basic Configuration မှ SSID Name နေရာတွင် wifi name နှင့် WPA PreSharedKey နေရာတွင် wifi password ကိုချိန်းပေးပါ ။ ပြီးလျှင် Apply နှိပ်ပါ။